

产品性能






SEB11-E




型号			SEB11-E
额定负载	电流	A	25
	电压	V	500
介质耐压	线圈/触点	V/min	4000
	触点间	V/min	2500
螺钉扭矩			Nm 1.2
外连接导线			AWG/mm ² 20-12/0.5-3.3
使用环境			°C -40~+75
重量			g 64

配件附件表

产品型号	金属卡簧	模块	导轨
SEB11-E			
	SE52M	BMD	PFP

外形尺寸、安装尺寸 (mm)

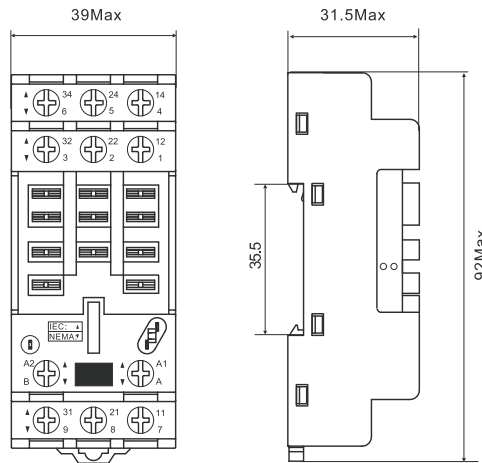

端子配置及接线图

- Ⓐ Ⓑ : A1 A2
- ① ② ③ : NC
- ④ ⑤ ⑥ : NO
- ⑦ ⑧ ⑨ : COM

