

产品性能



SKB08-E



SKB14-E




型号			SKB08-E	SKB14-E
额定负载	电流	A	12	10
	电压	V	300	
介质耐压	线圈/触点	V/min	4000	
	触点间	V/min	2500	
螺钉扭矩	Nm		1.0	
外连接导线	AWG/mm ²		20-14/0.5-2.5	
使用环境	°C		-40~+85	
重量	g		50	56

配件附件表

产品型号	塑料卡扣	金属卡簧	标记牌	模块
SKB08-E				
SKB14-E	SK36F	SK36M	SK4P	AMD

外形尺寸、安装尺寸 (mm)

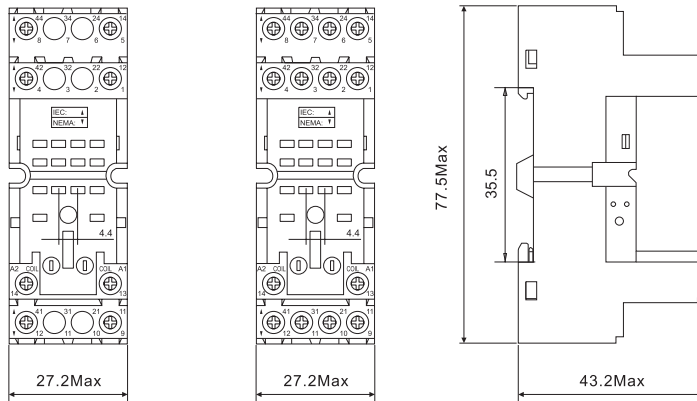


SKB08-E

SKB14-E

端子配置及接线图

SKB08-E

- ⑬ ⑭ : A1 A2
- ① ④ : NC
- ⑤ ⑧ : NO
- ⑨ ⑫ : COM



SKB14-E

- ⑬ ⑭ : A1 A2
- ① ② ③ ④ : NC
- ⑤ ⑥ ⑦ ⑧ : NO
- ⑨ ⑩ ⑪ ⑫ : COM

