



产品性能



SKC08-E



SKC14-E




型号		SKC08-E	SKC11-E	SKC14-E
额定负载	电流	A	12	10
	电压	V	300	
介质耐压	线圈/触点	V/min	4000	
	触点间	V/min	2500	
螺钉扭矩	Nm	1.0		
外连接导线	AWG/mm ²	20-14/0.5-2.5		
使用环境	°C	-40~+85		
重量	g	50	56	62

配件附件表


产品型号	塑料卡扣	金属卡簧	标记牌	模块
SKC08-E				
SKC11-E				
SKC14-E				
	SK36F	SK36M	SK4P	AMD

外形尺寸、安装尺寸 (mm)

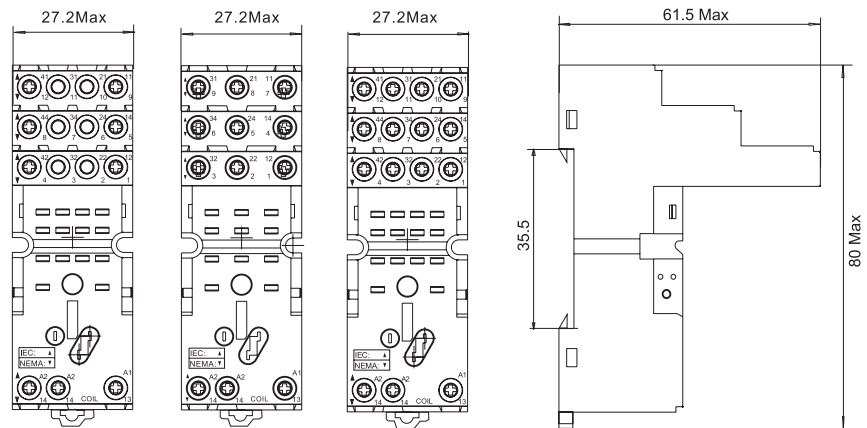

SKC08-E SKC11-E SKC14-E

端子配置及接线图



SKC08-E

SKC14-E

⑬ ⑭ : A1 A2
 ① ④ : NC
 ⑤ ⑧ : NO
 ⑨ ⑫ : COM

⑬ ⑭ : A1 A2
 ① ② ③ ④ : NC
 ⑤ ⑥ ⑦ ⑧ : NO
 ⑨ ⑩ ⑪ ⑫ : COM