



产品性能

型号	输入	Relay
SNB05-E-AR	6~24VDC	6~24VDC
SNB05-E-A	6~24V	6~24VDC
SNB05-E-B	48V	24VDC
SNB05-E-C	110V	24VDC
SNB05-E-D	230V	48VDC
SNB05-E-DA	230V	60VDC






SNB05-E


产品性能

额定负载	电流	A	8
	电压	V	300
介质耐压	线圈/触点	V/min	4000
	触点间	V/min	2000
螺钉扭矩	Nm	0.5	
外连接导线	AWG/mm ²	20-16/0.5-1.5	
使用环境	°C	-40~+85	
重量	g	19.5	

配用附件表

产品型号	连接桥	标记牌
 SNB05-E	 SN20A	 SN64P

外形尺寸、安装尺寸 (mm)

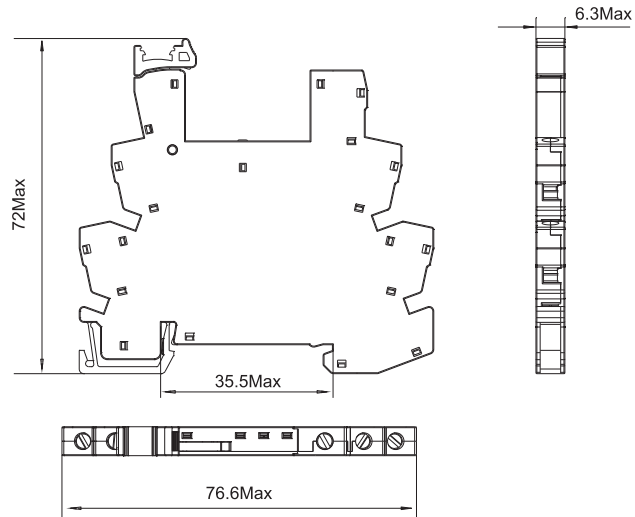

端子配置及接线图

