

产品性能



SRT05-E



SRT08-E




型号		SRT05-E	SRT08-E
额定负载	电流	A	16
	电压	V	300
介质耐压	线圈/触点	V/min	4000
	触点间	V/min	2500
螺钉扭矩	Nm	1.0	
外连接导线	AWG/mm <sup>2</sup>	20-14/0.5-2.5	
使用环境	°C	-40~+85	
重量	g	22	27

配用附件表


产品型号	塑料卡扣	连接桥
SRT05-E		
SRT08-E	SR20 (附件已配)	SR08C

外形尺寸、安装尺寸 (mm)

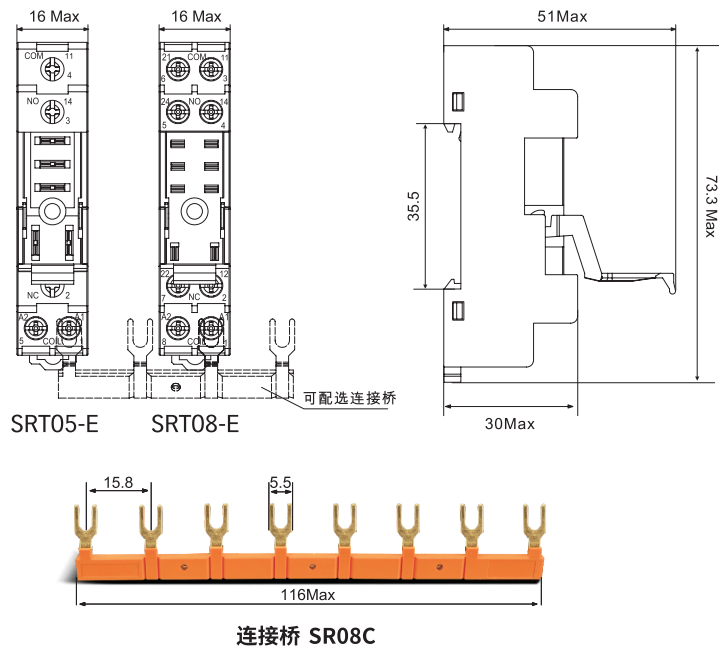


端子配置及接线图

- ① ⑤ : A1 A2
- ② : NC
- ③ : NO
- ④ : COM



SRT05-E



SRT08-E

- ① ⑧ : A1 A2
- ② ⑦ : NC
- ④ ⑤ : NO
- ③ ⑥ : COM