

产品性能



SKF08-E






SKF14-E




| | | | |
|-------|---------------------|---------------|---------|
| 型号 | | SKF08-E | SKF14-E |
| 额定负载 | 电流 | A | 12 |
| | 电压 | V | 300 |
| 介质耐压 | V/min | 2500 | |
| 螺钉扭矩 | Nm | 1 | |
| 外连接导线 | AWG/mm ² | 20-14/0.5-2.5 | |
| 使用环境 | °C | -40~+85 | |
| 重量 | | g | 35 |
| | | | 45 |

配用附件表

| 产品型号 | 金属卡簧 | 标记牌 | 模块 |
|---------|---|---|--|
| SKF08-E | | | |
| SKF14-E |  SK36M |  SK2P |  AMD |


外形尺寸、安装尺寸 (mm)

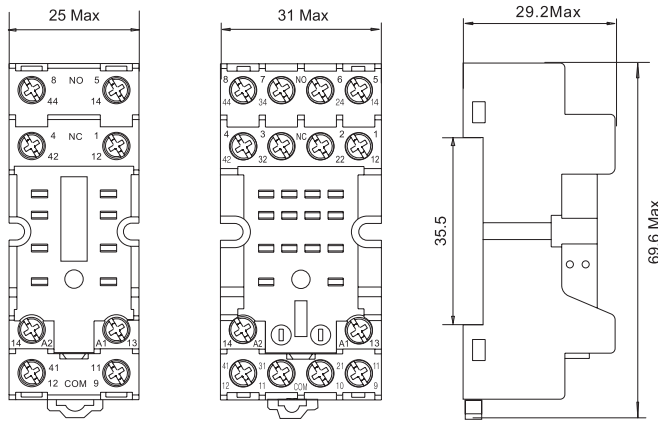

SKF08-E


SKF14-E

端子配置及接线图



SKF08-E

- ⑬ ⑭ : A1 A2
- ① ④ : NC
- ⑤ ⑧ : NO
- ⑨ ⑫ : COM



SKF14-E

- ⑬ ⑭ : A1 A2
- ① ② ③ ④ : NC
- ⑤ ⑥ ⑦ ⑧ : NO
- ⑨ ⑩ ⑪ ⑫ : COM