


SKB□□-E
SKC□□-E

RKF继电器插座

精湛品质
优中之选
优选系列

Shenler

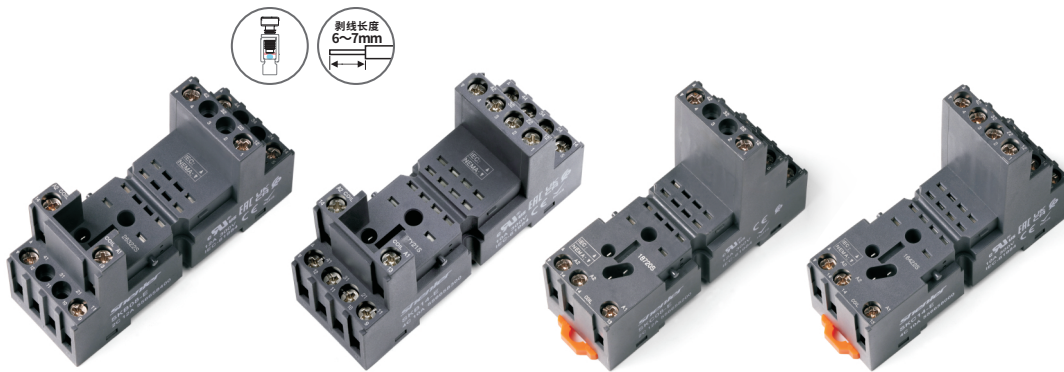

SKB08-E

SKB14-E

SKC08-E

SKC14-E



SK36F
塑料卡扣



AMD
模块



SK4P
标记牌




SK36M
金属卡簧

插座

型号	SKB08-E	SKC08-E	SKB14-E	SKC14-E
额定负载电流	12A		10A	
额定负载电压	300V			
介质电压	线圈-触点	4000V/min		
	触点-触点	2500V/min		
螺钉扭矩	1.0Nm			
接线范围（螺钉）	0.5~2.5mm ²			
使用环境温度	-40~+85℃			
长x宽x高 mm	SKB08-E&SKB14-E 77.5/27.2/43.2			
	SKC08-E&SKC14-E 80/27.2/61.5			
重量	50g		56g	62g


外形图尺寸 (mm)

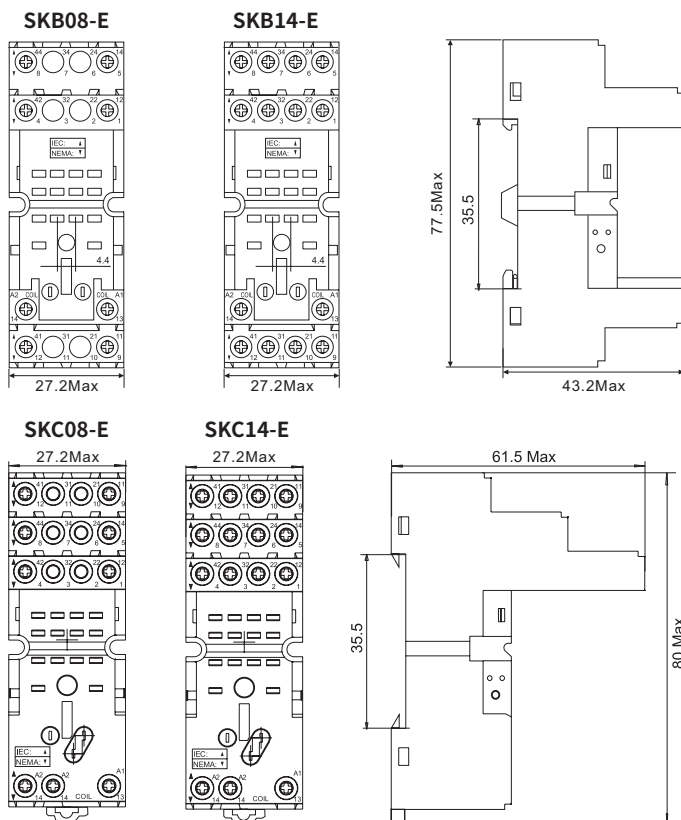

端子配置及接线图


SKB08-E

⑬ ⑭ : A1 A2
① ④ : NC
⑤ ⑧ : NO
⑨ ⑫ : COM




SKC08-E

⑬ ⑭ : A1 A2
① ④ : NC
⑤ ⑧ : NO
⑨ ⑫ : COM



SKB14-E

⑬ ⑭ : A1 A2
① ② ③ ④ : NC
⑤ ⑥ ⑦ ⑧ : NO
⑨ ⑩ ⑪ ⑫ : COM



SKC14-E

⑬ ⑭ : A1 A2
① ② ③ ④ : NC
⑤ ⑥ ⑦ ⑧ : NO
⑨ ⑩ ⑪ ⑫ : COM

