

STB08-E STB14-E

RKL继电器插座

精湛品质
优中之选
优选系列

Shenler



STB08-E



STB14-E



SK36M



ST36M4C

金属卡簧



AMD



BMD


模块

插座

型号	STB08-E	STB14-E
额定负载电流	16A	
额定负载电压	300V	
介质电压	线圈-触点 4000V/min	
	触点-触点 2500V/min	
螺钉扭矩	0.8~1.0Nm根据线径在0.8-1.0Nm范围内适当调整锁紧扭力	
接线范围 (螺钉)	0.5~2.5mm ²	
使用环境温度	-40~+85℃	
长x宽x高 mm	84/24.5/30mm	84/44.5/30mm
重量	46g	78g

插座不含附件


外形图尺寸 (mm)

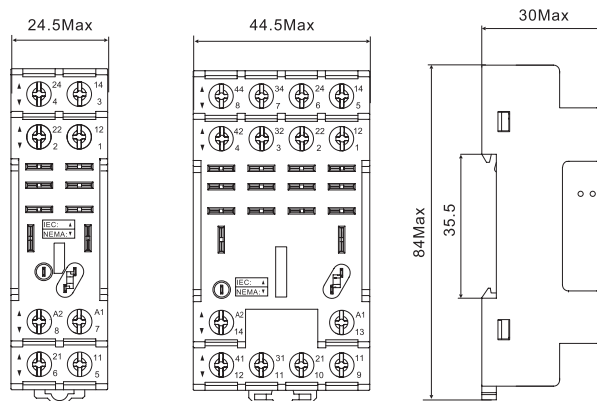

STB08-E


STB14-E

端子配置及接线图



STB08-E

⑦⑧ : A1 A2
①② : NC
③④ : NO
⑤⑥ : COM



STB14-E

⑬⑭ : A1 A2
①②③④ : NC
⑤⑥⑦⑧ : NO
⑨⑩⑪⑫ : COM