

SRC□□-P
SRB□□-E
R2G继电器插座

精湛品质
优中之选
优选系列

Shenler



SRB05-E

SRB08-E



SR15L
塑料板扣



SR2P
标记牌



AMD
模块



SRC05-P



SR15M
金属卡簧



SRC08-P




SR1520M
金属卡簧

插座

型号	SRC05-P	SRC08-P	SRB05-E	SRB08-E
额定负载电流	12A	8A	12A	10A
额定负载电压	300V			
介质电压	线圈-触点	4000V/min		
	触点-触点	2500V/min		
螺钉扭矩	-		1.0Nm	
接线范围（螺钉）	-		0.5~2.5mm²	
使用环境温度	-40~+85℃			
长x宽x高 mm	SRC05-P/SRC08-P 31.5/13/13.7mm(不含卡簧)			
	SRB05-E/SRB08-E 77/15.8/43mm(不含卡扣)			
重量	10g	10g	33g	37g

端子配置及接线图


- ① ⑤ : A1, A2
② : NC
③ : NO
④ : COM
- ① ⑧ : A1, A2
② ⑥ : COM
④ ⑤ : NO
② ⑦ : NC



SRC05-P

SRC08-P
底视图

外形图尺寸 (mm)

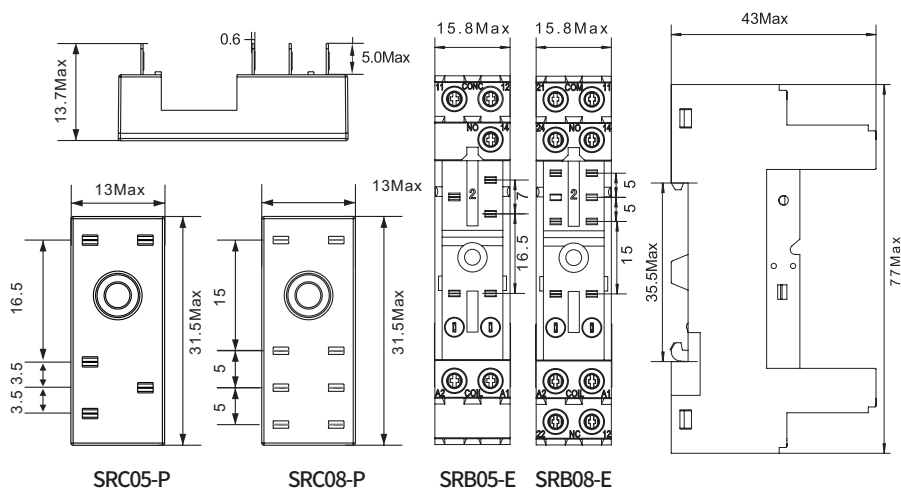

SRC05-P


SRC08-P

SRB05-E


SRB08-E

- ① ⑤ : A1, A2
② : NC
③ : NO
④ : COM

- ① ⑧ : A1, A2
② ⑦ : NC
④ ⑤ : NO
③ ⑥ : COM



SRB05-E



SRB08-E