

SRC□□-ST
SRC□□-E
R2G继电器插座

精湛品质
优中之选
优选系列



Shenler



SRC05-ST

SRC08-ST

SRC05-E

SRC08-E



SR15L
塑料板扣



SR2P
标记牌




AMD
模块

插座

型号	SRC05-ST	SRC08-ST	SRC05-E	SRC08-E
额定负载电流	16A	10A	12A	10A
额定负载电压	300V			
介质电压	线圈-触点	4000V/min		
		触点-触点		
螺钉扭矩	-			1.0Nm
接线范围 (螺钉)	0.5~2.5mm ²			
使用环境温度	-40~+85°C			
长x宽x高 mm	SRC05-ST/SRC08-ST 102/16/43mm(不含卡扣)			
	SRC05-E/SRC08-E 80/15.8/61.5mm(不含卡扣)			
重量	37g	42g	33g	37g


端子配置及接线图

① ⑤ : A1 A2
② : NC
③ : NO
④ : COM




SRC05-ST

① ⑧ : A1 A2
② ⑦ : NC
④ ⑤ : NO
③ ⑥ : COM



SRC08-ST


外形图尺寸 (mm)

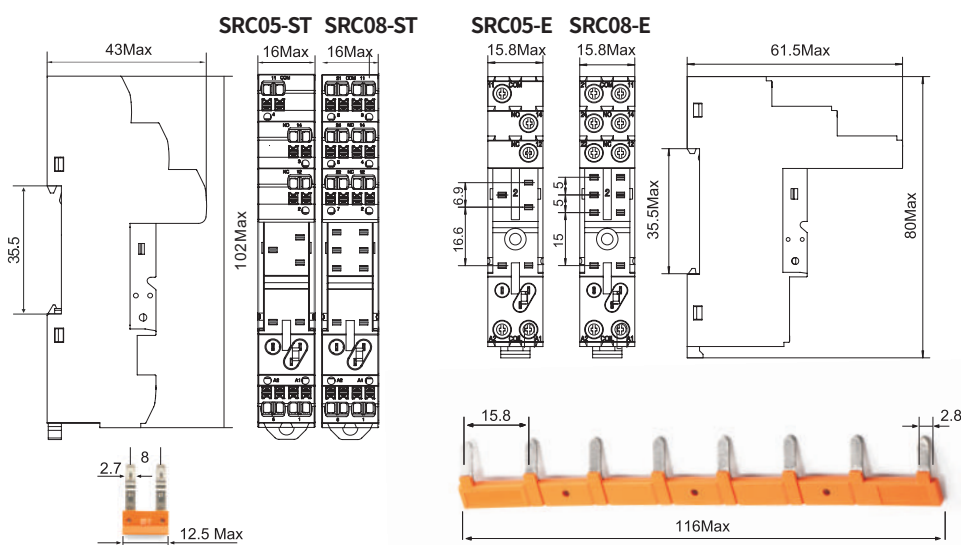

连接桥 ST01CC (适配SRC05/08-ST)


连接桥 SR08B (适配SRC05/08-E)

① ⑤ : A1 A2
② : NC
③ : NO
④ : COM



SRC05-E

① ⑧ : A1 A2
② ⑦ : NC
④ ⑤ : NO
③ ⑥ : COM



SRC08-E